

Waste Procedure – UCL Chemical Engineering

: 10/11/2021

: 1

: Ralph Hick (Departmental Safety Officer)


: 05/22

This document details the waste streams available in the UCL Department of Chemical Engineering, what -3(o)-2(p)m0 g00 G

All flammable solvents must be put into these cans. The solvents must be separated in different cans if they cannot be mixed, e.g. chlorinated and non-chlorinated waste. Once full they will need to be disposed of into the waste in the red cabinet outside the Darwin building. The lab user must arrange with the DSO when to visit the red cabinet to dispose of the contents of the solvent.

The waste must be segregated from incompatible waste, for example:

- Chlorinated and non-chlorinated waste.
- Organic and inorganic waste.
- Acid and base waste.

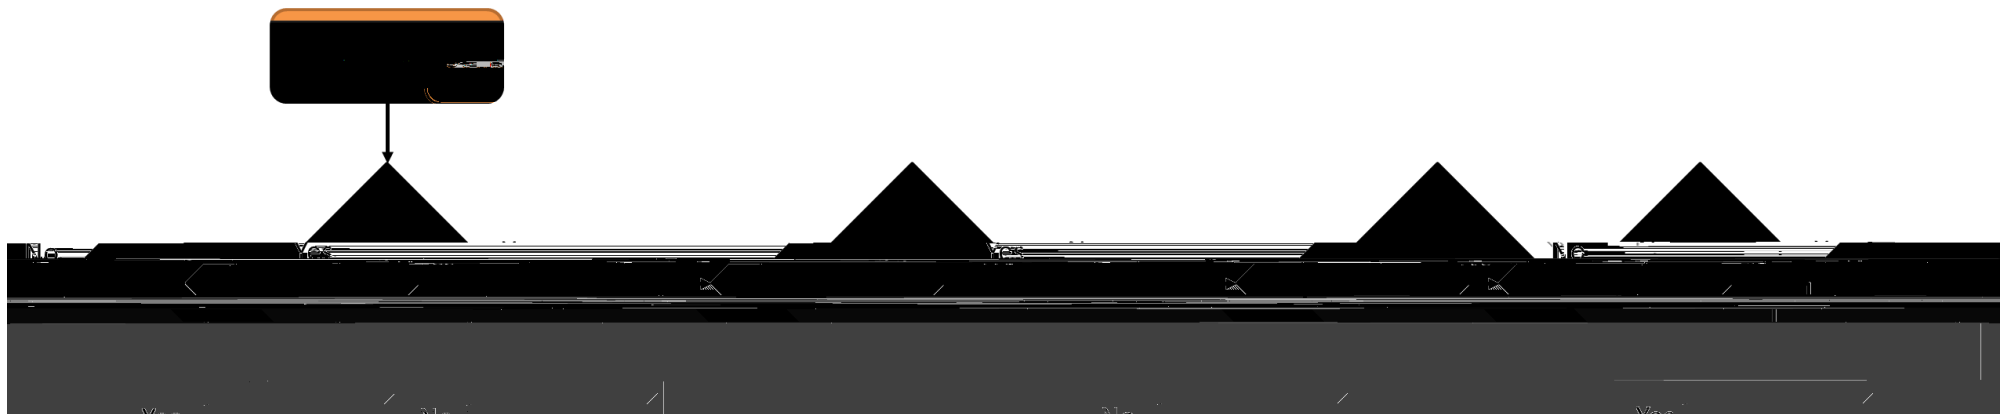

Disposal Method			
/ Lab users in yellow bin outside Darwin building Key from DSO	Yellow Linings	Contaminated waste: e.g. gloves, tissues, weighing boats.	Put